



1 1.8m STANDARD WOOD SCREEN FENCE AND GATE
 L07 SCALE: N.T.S.

Wood Screen Fencing Notes:

- All fencing to be placed 150mm inside private property (unless otherwise noted).
- Ensure that fence posts are 1.5m from gasline.
- All timber posts to be pressure treated SPF sawn timber posts to be treated with a solution of pentachlorophenol and petroleum to CSA-080.
- All lumber shall be clean #1, construction grade SPF members, finished as per the details unless otherwise specified.
- All lumber shall be straight, bound and free of splints, warps, cracks, large knots, and other defects.
- Color of fence to be pewter solid stain by Cloverdale paints for all fencing members. Paint to be applied as per manufacturer's specifications. Two coats of stain required. Second coat to be applied at the end of warranty period.
- All dimensions are in millimeters (mm) unless otherwise noted.
- All hardware to be galvanized.
- Nails to be 89mm coated for stringers to posts and 57mm Ardox coated for boards (3 per board).
- Contractor to call Alberta One Call at 1-800-242-3447 to have existing utilities located prior to start of any construction.
- This drawing to be read in conjunction with the written specifications, drawings, and details for the project.

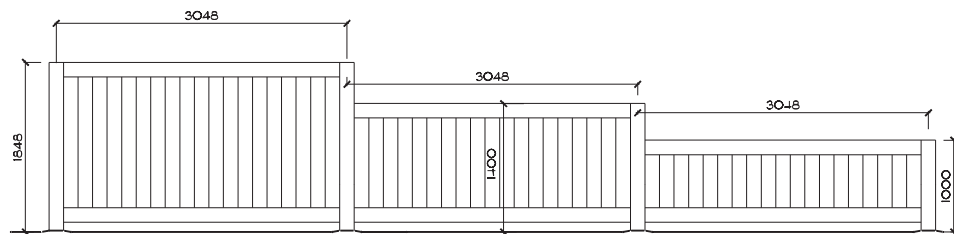

2 WOOD SCREEN FENCE STEP DOWN
 L07 SCALE: N.T.S.

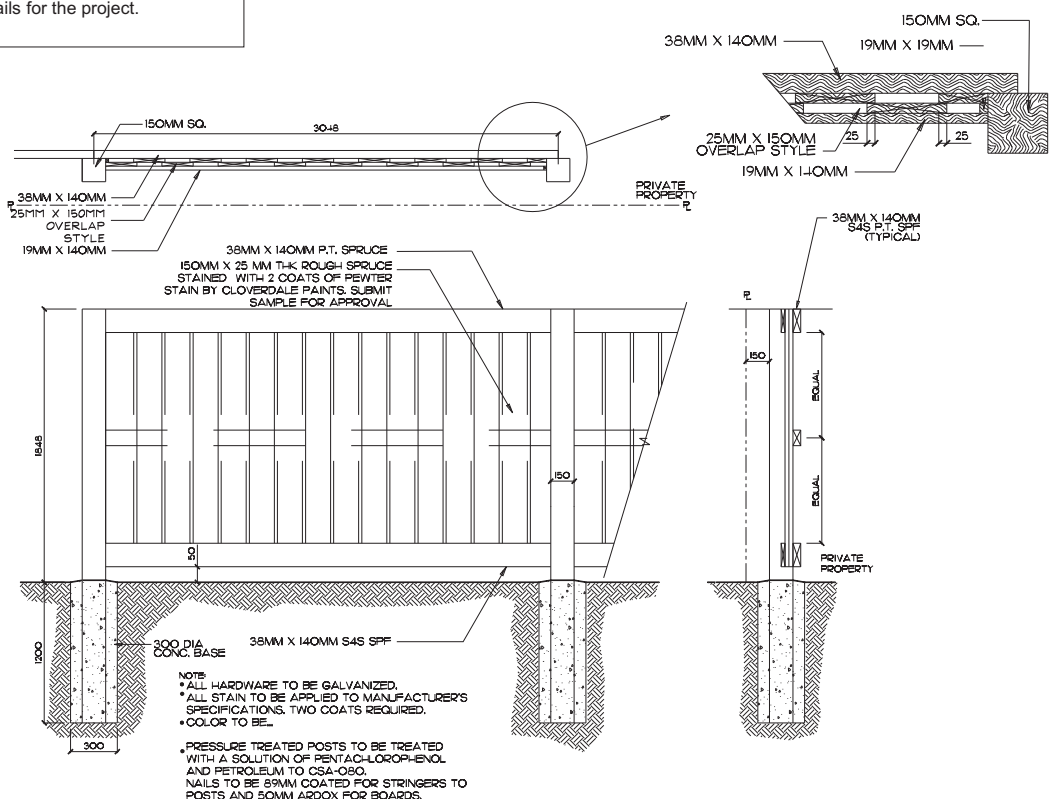

4 OVERLAP BOARD WOOD SCREEN FENCE
 L07 SCALE: N.T.S.